



Jet-Air

Cool, Warm & Collected

- 8 models from 5.5T to 30T
- Robust and durable construction
- To cool & heat large-sized and open areas with ducting
- Flexible Airflow and ESP to meet project needs

Rooftop Inverter



Proudly distributed by

JASA
Smart Home

Johannesburg (011)708 1148
Pretoria (012)752 8777
East Rand (011)823 2119
Cape Town (021)823 8866

Durban (031)577 0498
Nelspruit (013)752 3258
Port Elizabeth (041)364 0947
Botswana (00267)262 2909


Rooftop Inverter

Technical Specifications



Model			JASA-GK-H5.5TH	JASA-GK-H7.5TH	JASA-GK-H10TH	JASA-GK-H15TH	JASA-GK-H20TH	JASA-GK-H25TH	JASA-GK-H30TH
Nominal Capacity	Cooling	Kw	22.00	29.00	34.00	50.10	63.50	85.00	108.00
		Btu/h	75100	98900	116000	170900	216700	290000	368500
	Heating	Kw	26.00	32.00	39.00	56.00	75.00	92.00	128.00
		Btu/h	88700	109200	133000	191100	255900	313900	436700
Sound Pressure Level (H/M/L)*		dB (A)	66	68	72	74	76	77	77
Air Flow Volume		CFM	1765.5	2589.4	3413.3	5590.75	8824	9706	9710.25
Rated ESP		Pa	60	80	90	130	150	200	125
Power supply		V-Hz-Ph	380-415-50-3						
Power Input	Cooling		8.5	9.0	13.5	23.0	28.5	32.0	43.0
	Heating		7.5	8.0	11.5	16.5	25.0	30.0	38.0
Refrigerant	Refrigerant Type		R410A	R410A	R410A	R410A	R410A	R410A	R410A
	Throttling Method		Electronic expansion valve/Electronic expansion valve						
	Charge	Kg	5.0	8.0	10.0	12.0	16.0	25.0	14.0+14.0
Evaporator Coil	Face Area	m ²	0.40	0.65	0.65	0.94	1.14	2.55	1.62
	Number of rows	/	4	4	4	4	4	4	4
	Fins per Inch(FPI)	/	16	16	16	18	16	18	18
Quantity		/	2	2	2	1	2	2	1
Evaporator Fan motor	Diameter	inch	9.84-9.84	9.84-9.84	9.84-9.84	15.0-15.0	29.528-31.496	14.8-15.9	17.72-19.17
	Motor Drive Type	/	Direct Drive	Direct Drive	Direct Drive	Belt	Belt	Belt	Belt
	Motor Speed	rpm	1080	1200	1400	854	1035	1017	728
Compressor	Type	/	Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Scroll	Inverter Scroll
	Quantity	/	1	1	1	2	2	2	2
Compressor Coil	Face Area	m ²	1.29	2.34	2.34	2.43	3.18	4.82	28.13+28.13
	Number of rows	/	3	3	3	3	3	3	3
	Fins per Inch(FPI)	/	16	16	16	16	16	17	16
Quantity		/	1	1	1	1	2	2	2
Condenser Fan motor	Diameter	inch	22.68-7.97	29.72-9.69	29.72-9.69	29.72-9.69	29.72-9.69	29.72-9.69	29.72-9.69
	Motor Drive Type	/	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive	Direct Drive
	Motor Speed	rpm	950	720	860	950	800	800	900
Dimension	Outline (WXDXH)	mm	1450×1120×815	1450×1120×1215	1450×1120×1215	2260×1140×1245	2240×1880×1250	2880×2240×1270	2850×2240×1240
	Package (WXDXH)	mm	1463×1133×860	1463×1133×1260	1463×1133×1260	2283×1163×1290	2258×1898×1300	2893×2253×1290	2863×2253×1285
Weight	Net weight	Kg	268.0	348.0	350.0	590.0	820.0	1157.0	1009.0
	Gross weight	Kg	289.0	368.0	370.0	618.0	870.0	1201.0	1070.0

Dimension(mm)																
Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
JASA-GK-H5.5TH	815	1450	1120	70	98	417	94	916	65	190	144	866	105			
JASA-GK-H6.2TH	815	1450	1120	70	98	417	94	916	65	190	144	866	105			
JASA-GK-H7.5TH	1215	1450	1120	70	98	686	94	916	70	190	144	866	105			
JASA-GK-H10TH	1215	1450	1120	70	98	686	94	916	70	190	144	866	105			
JASA-GK-H15TH	1245	2260	1140	80	111	595	50	914	58	406	298	487	349			
JASA-GK-H20TH	1250	1880	2240	85	115	590	158	2021	45	412	311	1336	588			
JASA-GK-H25TH	1270	2880	2240	90	138	585	224	1920	71	407	294	1329	610			
JASA-GK-H30TH	1250	3800	2240	90	252	868	192	753	169	1015	147	1024	147	1024	664	1035

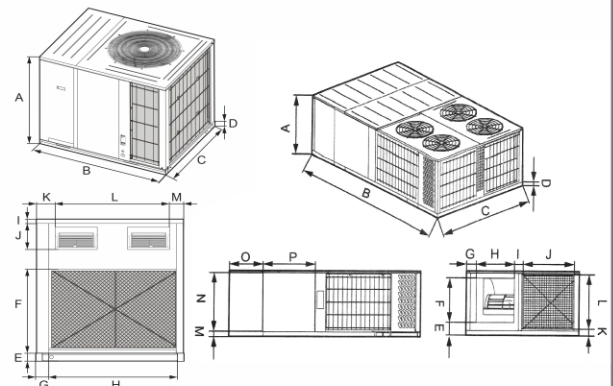

5.5-25TH

30TH

Due to JASA policy of constant improvement, specifications are subject to change without prior notice.

Remarks: Cooling capacities are based on indoor air temp. 27°C DB, 19°C WB and outdoor air temp. 35°C DB, 24°C WB. The above specifications are subject to change without prior notice for product improvement.

E.&O.E.

www.jet-air.co.za

