

Jet-Air
Cool, Warm & Collected



www.jet-air.co.za



Due to **JASA** policy of constant improvement, specifications are subject to change without prior notice.

Remarks: Cooling capacities are based on indoor air temp. 27°C DB, 19°C WB and outdoor air temp. 35°C DB, 24°C WB. The above specifications are subject to change without prior notice for product improvement.

E.&O.E.



Jet-Air
Cool, Warm & Collected



- Silent
- Auto Restart Function
- Self-diagnosis Function
- Sleep Mode

Ceiling / Floor Fixed Speed

R410A



Proudly distributed by

JASA
Smart Home

Johannesburg (011)708 1148
Pretoria (012)752 8777
East Rand (011)823 2119
Cape Town (021)823 8866

Durban (031)577 0498
Nelspruit (013)752 3258
Port Elizabeth (041)364 0947
Botswana (00267)262 2909




Ceiling / Floor Fixed Speed

Technical Specifications



Model	Indoor		JASA-Ce-H18A4/R	JASA-Ce-H24A4/R	JASA-Ce-H36A4/R	JASA-Ce-H36A5/R	JASA-Ce-H48A5/R	JASA-Ce-H60A5/R	
	Outdoor		JASA-H18A4/R	JASA-H24A4/R	JASA-H36A4/R	JASA-H36A5/R	JASA-H48A5/R	JASA-H60A5/R	
Power Supply	V~,Hz,Ph		220~240,50,1	220~240,50,1	220~240,50,1	380~415,50,3	380~415,50,3	380~415,50,3	
Capacity	Cooling	Btu/h	18425	24566	36160	36160	48000	55000	
		kW	5.40	7.20	10.60	10.60	14.07	16.12	
	Heating	Btu/h	19790	25931	39920	39920	53057	60000	
		kW	5.80	7.60	11.70	11.70	15.55	17.58	
Electric Data	Rated Cooling Power Input		kW	1.65	2.24	3.57	3.50	4.85	5.20
	Rated Heating Power Input		kW	1.50	2.10	3.50	3.45	4.80	5.10
	Rated Cooling Current		A	7.80	9.74	16.30	5.82	9.10	12.00
	Rated Heating Current		A	7.20	9.13	15.80	5.60	9.00	10.30
Performance	EER/COP		W/W	3.27/3.87	3.21/3.62	2.97/3.34	3.03/3.39	2.90/3.24	3.10/3.45
Indoor Unit	Indoor Air Flow (Hi/Mi/Lo)		m ³ /h	950/700/560	1600/1260/800	1600/1260/800	1600/1260/800	2000/1800/1250	2000/1800/1250
	Noise Level(Hi/Mi/Lo)		dB(A)	43/35/32	50/46/42	50/46/42	50/46/42	51/46/40	51/46/40
	Net Dimension (W*H*D)		mm	1000×690×235	1280×690×235	1280×690×235	1280×690×235	1600×690×235	1600×690×235
	Packing Dimension (W*H*D)		mm	1080×770×325	1360×770×325	1360×770×325	1360×770×325	1680×770×325	1680×770×325
	Net/Gross Weight		kg	29.0/33.0	36.0/42.0	36.0/42.0	36.0/42.0	44.0/50.5	44.0/50.5
Outdoor Unit	Noise Level		dB(A)	55	57	60	60	60	60
	Dimension (W×D×H)	Net	mm	800×315×545	825×310×655	970×395×805	970×395×805	940×370×1325	940×370×1325
		Packing	mm	920×400×620	945×435×725	1105×495×890	1105×495×890	1080×430×1440	1080×430×1440
	Weight	Net/Gross	kg	42/45	53/56	65/75	65/75	95/105	99/109
Refrigerant Type			g	R410A/1250	R410A/1750	R410A/2200	R410A/2150	R410A/3000	R410A/3000
Refrigerant Pipe	Liquid Side		mm	1/4"	3/8"	3/8"	3/8"	3/8"	3/8"
	Gas Side		mm	1/2"	5/8"	5/8"	5/8"	3/4"	3/4"
	Max. Refrigerant Pipe Length		m	20	20	30	30	50	50
	Max. Difference In Level		m	15	15	20	20	30	30

Indoor Dimension				
Model	WxHxD(mm)	Packing Dimension(mm)	W1(mm)	H1(mm)
JASA-Ce-H18/4R	1000x690x235	1080x770x325	944	280
JASA-Ce-H24/4R	1280x690x235	1360x770x325	1224	280
JASA-Ce-H36/4R	1280x690x235	1360x770x325	1224	280
JASA-Ce-H36/5R	1280x690x235	1360x770x325	1224	280
JASA-Ce-H48/5R	1600x690x235	1680x770x325	1544	280
JASA-Ce-H60/5R	1600x690x235	1680x770x325	1544	280

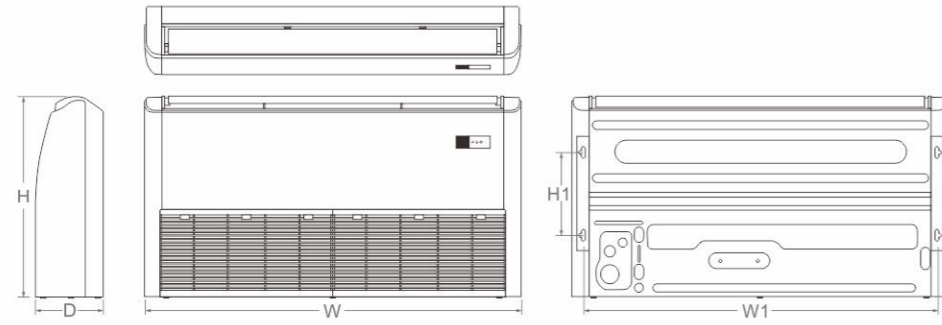

Outdoor Dimension				
Model	W1(W2)xHxD(mm)	Packing Dimension(mm)	A(mm)	B(mm)
JASA-H18/4R	800(860)x315x545	920x400x620	545	315
JASA-H24/4R	825(893)x310x655	945x435x725	540	335
JASA-H36/4R	970(1044)x395x805	1105x495x890	675	409
JASA-H36/5R	970(1044)x395x805	1105x495x890	675	409
JASA-H48/5R	940(1010)x370x1325	1080x430x1440	625	364
JASA-H60/5R	940(1010)x370x1325	1080x430x1440	625	364

